




PIVOTAL EDGE

www.thepivotaledge.com

Manual Version

- * Work safely on the ground
- * Faster loading cycles
- * Inflatable gasket maintains a positive seal
- * No welding required for installation and is compatible with most 20 inch manholes
- * Manual crank
- * Screw jack operation
- * No electronics

Cover Dimensions

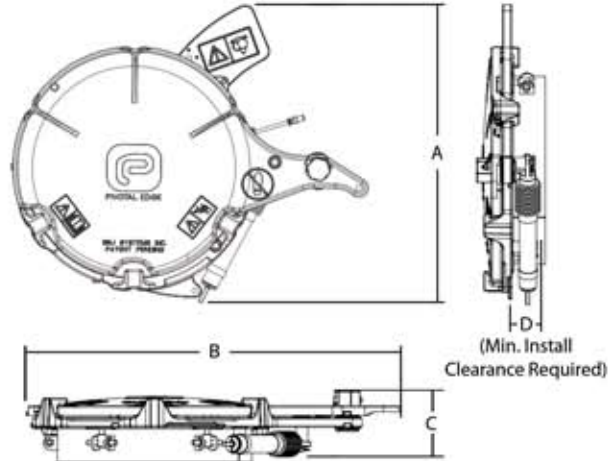

Overall Dimensions:

- A...32.9" (83.57 cm)
- B...39.4" (100.08 cm)
- C...6.9" (17.53 cm)
- D...3.1" (7.87 cm)

Mounting Ring Opening...20" (50.8 cm)

Inflatable Bladder Temp. Rating:

-40°F (-40°C) to 150°F (65°C)


Manual Actuator

Shipping Weight.....92 lbs (41.3 KG)

Control Box Dimensions

Overall Dimensions:

- E...7.87" (19.99 cm)
- F...5.91" (15.01 cm)
- G...4.72" (11.99 cm)

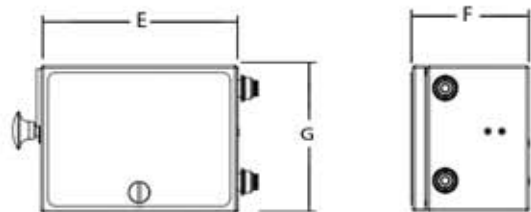

Shipping information:

4503 19th St. SE
Mandan, ND 58554

For more information
contact:

Pivotal Edge
PO Box 2636
Bismarck, ND
58502-2636

Office
1-701-223-0543

thepivotaledge.com

Actuator Cable Dimensions

Overall Dimension:

- E...12'-34' (3.66-10.36 m)
- Per Customer Request



System Requirements and Installation

The Pivotal Edge is designed to be installed with as few tools as necessary. Only common tools are required to install the cover and make the required connections. The majority of assembly is completed before the lid is delivered. The connection is made from the trailer's air supply to the control box.

Specifications subject to change without notice.